



Your all-in-one smart leasing platform.



Product Catalog

2023

1-888-340-6340 | sales@rently.com | [Rently.com](https://rently.com)

Your one-stop shop for all of your leasing needs.



Rently is the leader in property touring and smart home technology. We provide leasing automation solutions to help property managers lease faster, streamline operations, and increase NOI — with one log-in for one platform.


Whether you're seeking to increase security, reduce operating costs, or increase rental revenue, Rently has a tailored solution for you.

CONTENTS

Smart Leasing and Touring Solutions	4
Smart Home	6
Smart Management Platform	8
HARDWARE	
Rently Hub 3	10
Coming Soon: Rently Hub 4	11
ACCESS CONTROL	
Rently Access Panel 3	13
Rently SmartLock 2	14
Rently Smart Bolt (Keyed)	15
Kwikset Locks	16
Yale Locks	18
Passage Knobs and Levers	24
GoControl Z-Wave Plus Garage Door Controller	25
SMART MONITORING	
Rently Doorbell Camera	27
Rently Battery Doorbell Camera and Rently Tone	28
Rently Siren Alarm	30
Rently Door & Window Sensor	31
Rently Motion Sensor	32
Rently Motion Sensor 2	33
HomeSeer Z-Wave Plus Motion Sensor	34
ENERGY MANAGEMENT	
Smart Thermostats	36
Smart Lighting	38
Aeotec Z-Wave Range Extender 7	41
DAMAGE PREVENTION	
FirstAlert Z-Wave Smoke and Carbon Monoxide Detector	43
HomeSeer Z-Wave Plus Perimeter Water Sensor	44
2GIG Dual Flood/Temperature Sensor	45
Aeotec Z-Wave Water Sensor 7 Pro	46

Smart Leasing and Touring Solutions


Our guided renter journey allows prospects to securely tour vacant units and shared amenities with or without the presence of an agent.

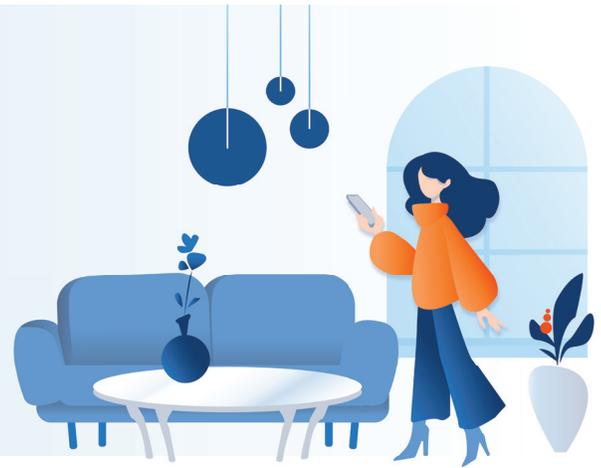

Rently Listings

Our listing site generates 25% of self-guided tours and receives more than 10 million visitors each year.

Rently also syndicates single-family properties to the web's most popular listing sites.

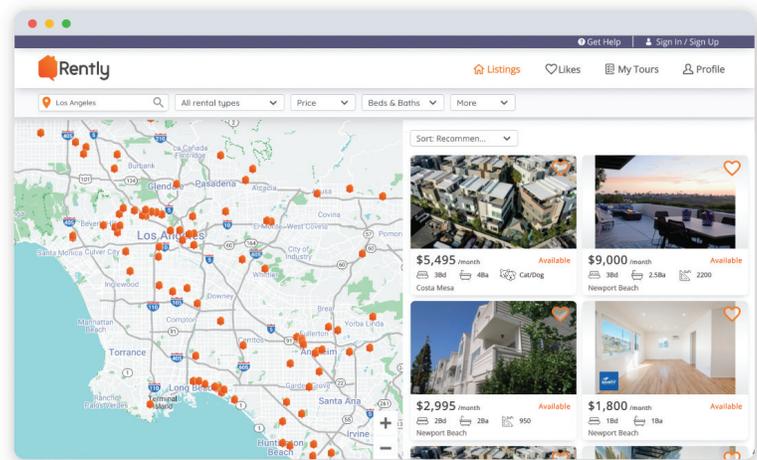

Rently Tours

Self-Guided Touring

- Step 1:** Prospects find your listings and register for our system online.
- Step 2:** Renters complete a multi-layer security process.
- Step 3:** At the door, renters enter a one-time, durational entry code into a smart lock or lockbox.
- Step 4:** Post tour, renters provide feedback and complete online rental application.

DID YOU KNOW?

40% of Renters



prefer to tour outside of regular business hours.

- Rently automatically responds to tour requests with a link to schedule a self-guided tour
- Prospective renters can access chat, email, and AI support while touring
- Multifamily managers can customize community access and parking instructions, and pin points of interest on their community map

Wayfinding

Our unique multifamily feature uses dynamic bluedot mapping to guide prospects from the parking area to specific units and amenities within your community.

- Activate new units for self-guided tours within seconds
- Easily add/remove map pins to highlight community points of interest
- Provide the most-user friendly self-touring experience currently available

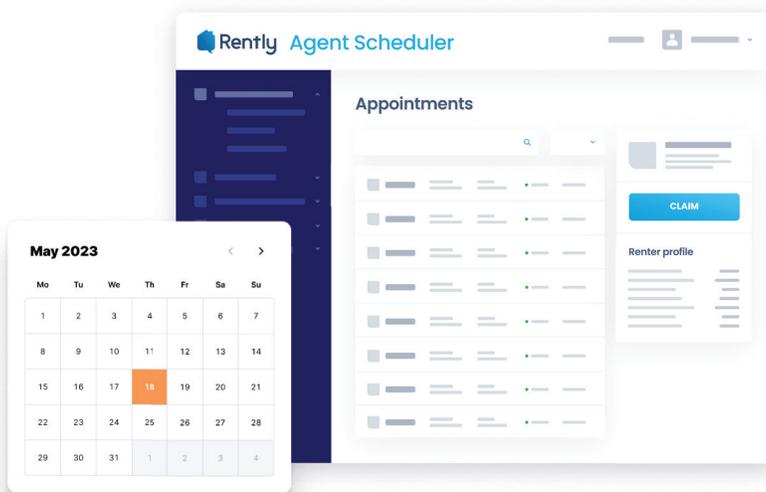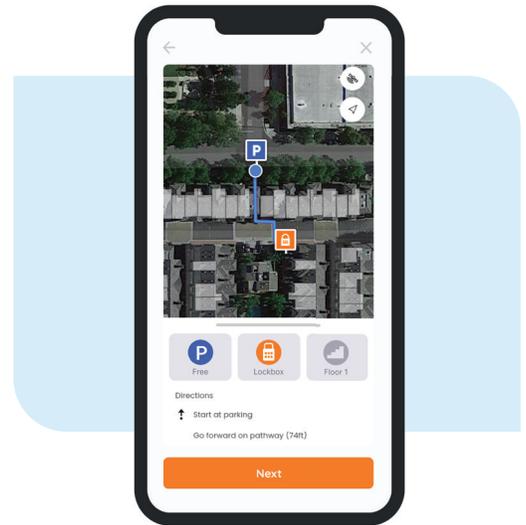

Agent Scheduler

Do your prospects prefer agent-led tours instead? We also offer renters an option to request an agent-led tour directly from your Rently Listing.

Rently integrates with your CRM calendar to show renters your availability. We then post appointments to your CRM calendar so all of your scheduled tours are visible in one location.

3-in-1 Rental Application

At the end of a tour, prospects can apply directly from the Rently Tours app. The Rently Application provides a quick and accurate way to validate rental prospects and streamline the application process.



ID Verification



Income Verification



Credit Verification

- Pre-fills up to 30% of renter data into the leasing application
- Allows renters to use the same application to apply to multiple properties under the same management company
- Seamlessly integrates with leading PMS and custom systems

Smart Home

From vacancy, through residency, to unit turnover, Rently's smart home solutions enhance all leasing activities for both renters and managers.



Rently Smart Home

- Smart Property Access
- Contactless Move-Ins/Outs
- Premier Resident Living
- Damage Prevention
- Secure Property Monitoring
- Efficient Energy Management



Optimize Your Entire Leasing Lifecycle

Vacancy: Install smart devices for an added layer of security and reduced utility costs when your properties are vacant.

Move-In: Allow contactless turnovers with no key exchange.

Leased: Offer luxury amenities for residents, with full remote control capabilities.

Move-Out: Automatically revoke resident access and provide vendors with durational codes for make-ready projects.

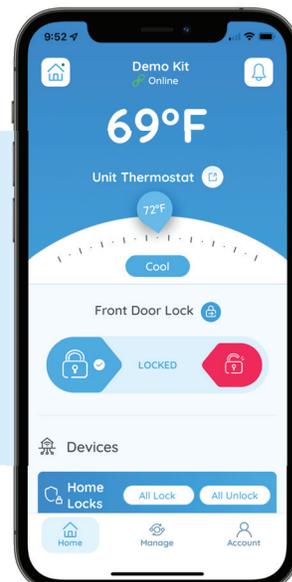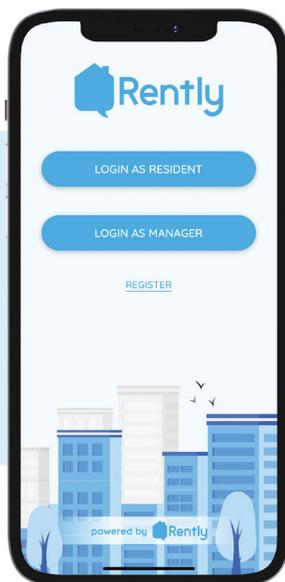

Automated Work Orders

Managers quickly initiate work orders and assign technicians to respond to resident service requests.

Easily gather resident information regarding location, service issue, priority level, request dates, and pet presence.

- Empower leasing teams with fast-track responses to resident requests
- Expedite work orders
- Streamline maintenance workflows
- Enhance resident experiences



Common Area Access


The Rently Access Panel 3 is a secure and convenient solution for property managers and residents to manage access to shared spaces in all property types.

- Residents can set up durational codes for guests, and managers can see a complete activity log in their portal and app
- Enable multiple modes of keyless entry (code, fob, app)
- Customize access hours and set Passage Mode to turn off auto-lock on common areas within a specified time
- Residents can reserve common areas (meeting rooms, lounges, pool, etc.) directly from the smart home app

Installer Workflow

Deploy confidently with Rently's streamlined installation workflow to accelerate the roll-out of smart home properties.


- Activate via Rently's Smart Home app
- Empower technicians with step-by-step instructions
- Link to real time technical support, if necessary
- Synchronize communication between technicians and managers
- Eliminate frustrations and delays
- Provides managers with visibility into device deployment status

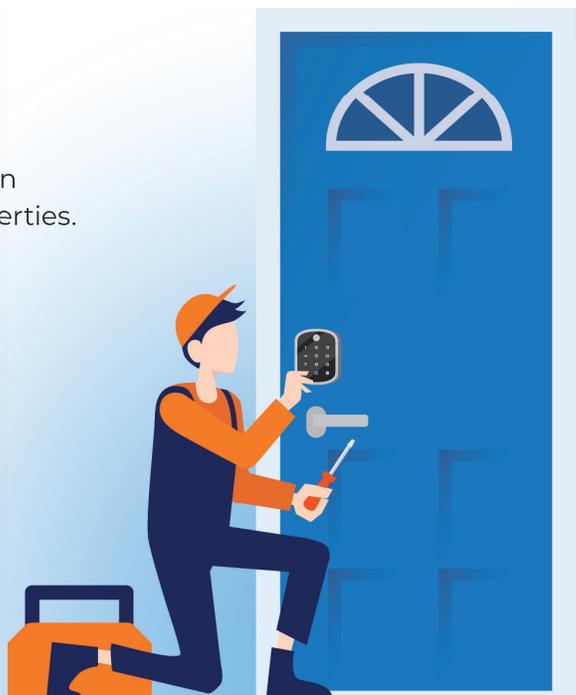

Smart Management Platform

We offer the ultimate, end-to-end solution to seamlessly manage every aspect of your leasing operations from one platform.

With the Rently Manager Portal and app, you can manage your tours, tenants, and devices for all of your properties.

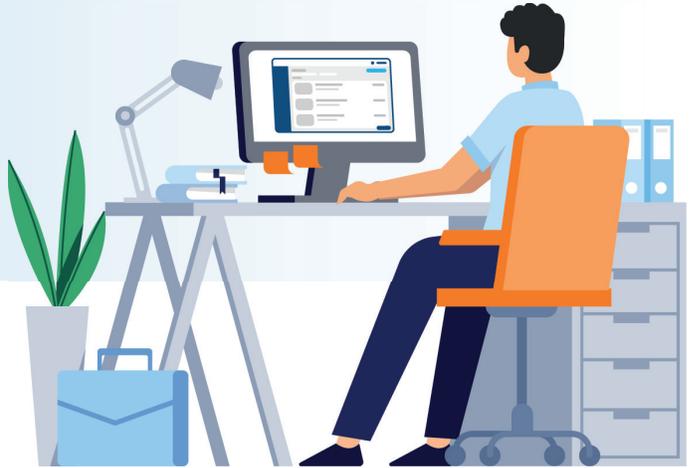

Remote Property Management

- Control multiple properties and devices with a single login
- Manage leads and view past and upcoming tour data in real-time
- Monitor tour status and device performance with our robust data dashboard



Lead Traffic Source

Rently.com	50%
community link	30%
Knock.com	10%

[See More](#)

Total Showings

Scheduled	~50
Completed	~45
No Show	~5
Cancelled	~5
Leased	~5
Inquired Leads	~5

506 Coimbatore rently, CRM tag: 1923055683
 \$1995/month
 3 Bd 3 Ba 1,708 sq ft
 rent-ready date: 08/28/2019

549 North Venice Boulevard, Los Angeles, CA 90291 CRM
 \$2840/month
 4 Bd 3.5 Ba 2,050 sq ft
 rent-ready date: 08/28/2019

7/1 Lord Sinha Road, Kolkata, AK 700071, CRM
 \$750/month
 2 Bd 1 Ba 1,050 sq ft
 rent-ready date: 09/17/2019

Self Guided Tour

Unit(s): 280
 Scheduled: 04/28/23 5:00 PM
 Status: Not Started
 Started: Pending
 Completed: Pending

[Send Reschedule Link](#)

[Reschedule Tour](#)

[Cancel Tour](#)

Chuck's Home
 205 Okamoto Street
 Raleigh, NC, 385277

021913 | Occupied | Heating to 61



HARDWARE

Features and Specifications

Rently Hub 3

The Rently Hub 3 connects to the cloud using 4G LTE, Wi-Fi, and Ethernet to ensure optimal uptime of your smart home devices. The hub integrates your Rently devices and products from other manufacturers and ensures they are connected to the Rently online and mobile apps for remote operation.



Compatibility



Compatible with all Z-Wave products. Contact customer support for specific product compatibility.

Product Specifications

Model Number:	RKH-TRI-01	Inputs:	Ethernet SIM card 5V DC = 2500mA Micro SD card
Product Measurements:	7 x 5.5 x 1.125"	CPU:	ARM Dual-Core Cortex-A7
Warranty:	1 Year	RAM:	1 GB
Required Wireless Connection: (Only one connection required)	3G/4G LTE Wi-Fi (802.11b/g/n) Ethernet (10/100M)	Cellular Module:	3G/4G LTE
Supported Wireless Standards:	Z-Wave Z-Wave Plus Bluetooth (BT4.0) Wi-Fi	Ethernet:	10/100M
Number of Supported Devices:	Up to 1800	Battery Backup:	Li-4 hours
Indoor Operating Environment: (Not suitable for outdoor use)	Temp: 0-60°C Humidity: up to 90%	Mounting Bracket:	Yes
Storage Environment:	Temp: -20-35°C Humidity: up to 50%	Swappable SIM:	Yes
		AC Power:	5VDC/2.5A
		Wireless Updates:	Yes

COMING SOON



Hub 4

The fourth release of our smart home hub is capable of integrating with over 1,800 Z-Wave® compatible devices and features a variety of connectivity options, allowing you to monitor your property without the need for Wi-Fi. With the Rently website or app, you can manage your entire portfolio of properties and devices from one online platform.

THE RENTLY DIFFERENCE:

Here at Rently, we engineer and manufacture our hubs in-house to ensure timely delivery and direct support from the Rently team.

ACCESS CONTROL

Rently Access Panel 3	11
Rently SmartLock 2	12
Rently Smart Bolt	13
Kwikset Home Connect 620 Deadbolt	14
Kwikset SmartCode 916 Deadbolt	15
Yale Assure Lock	16
Yale Pro SL Deadbolt	17
Yale Assure Levers	18
Yale Assure Lock Interconnected	19
Yale nexTouch Cylindrical	20
Yale nexTouch Sectional Mortise	21
Passage Knobs and Levers	22
GoControl Z-Wave Plus Garage Door Controller	23

Rently Access Panel 3

Rently now offers a common area access panel that fully integrates with the Rently Smart Home ecosystem. Easily manage access to your amenities and other common areas directly from your Rently portal and app.



Features

- **Secure Access:** Residents can set up durational codes for guests, and managers can see a complete activity log in their portal and app
- **Customizable Hours:** Managers can set up specific hours they want the panel to be accessible
- **Unlock via fob, app, or code:** With multiple ways to access, you never have to worry about being locked out

Product Specifications

Dimensions:	80 x 150 x 28mm (3.1 x 5.9 x 1.1")	NFC Induction Distance:	≤ 1.5mm (0.06in)
Weight:	738.5g (1.63lb)	Maximum Current:	1 ≤ 300mA
Power Source:	12VAC/24VAC, 12VDC/24VDC	Code and FOB Capacity:	2000
Wireless Connection:	Bluetooth 4.0, NFC	Operating Temperature:	-30 to 70°C (-22 to 158°F)
Output Mode:	Normally Open/Normally Close	Card Type:	CPU Card, IC Card
Quiescent Current:	≤ 25mA	Operating Humidity:	0 to 95% (relative humidity)



Rently SmartLock 2

Rently's Bluetooth-enabled deadbolt replaces keys with codes. Can be used for self-guided tours during vacancy and for resident access. Can be unlocked via code, Bluetooth, and fob. Does not require a hub or Wi-Fi.



Features

- Integrates with Rently self-guided tours
- Real-time vendor/employee/resident/guest access notifications with activity log
- Contactless move-ins/move-outs
- Create unique, temporary, or recurring access codes for family, friends, or service providers (e.g. dog walkers)
- Auto-lock feature
- Low battery alert

Product Specifications

Battery Life:	Up to 1 year
Power Source:	4 AA alkaline batteries
Protocol:	Bluetooth 4.0 BLE
Locking:	BLE, code, key
Devices:	Android 4.3, iOS 7.0+
Current:	Static <30uA, 200mA

RoHS  



Rently Smart Bolt (Keyed)

The next generation of Rently's Bluetooth-enabled deadbolt is the future of access control for rental homes, featuring increased security, durability, and battery life for worry-free property management and a smooth renter experience.

Features

- Integrates with property management software (Yardi, RealPage, Entrata) for easy resident move-ins and move-outs
- Manage hundreds of locks using a single login
- Bluetooth and cloud-controlled with no need for Wi-Fi
- Easy to install, includes all required hardware
- Two-year battery life with jump-start ability to prevent lockouts
- Unlock via code, fob, or Bluetooth
- Residents can issue durational codes for their guests and easily manage their lock with Rently's Smart Home app



Product Specifications

Dimensions:	8" x 5" x 3.25"
Protocol:	Bluetooth BLE, NFC
Devices:	iOS and Android
Compatibility	1 3/8" to 1 3/4" door thickness
Handing:	Self-handing
Power:	8 AA batteries
Codes:	Supports up to 200 unique codes
Operating Temp:	Exterior: -30°C to 75°C Interior: 25°C to 70°C
Certifications:	FCC Part 15; IC; CA65; ANSI/BHMA 156.36 Grade 2



Kwikset Home Connect 620 Deadbolt

Keyed | Push Button

This Z-Wave 700 smart lock is a suitable replacement for your existing standard or smart locks, offering premium protection and accessibility to your home. The Home Connect Smart Lock includes three methods to lock/unlock your front door: traditional turnkey, numeric passcodes, and remote access through the Rently Smart Home app.

Features

- Features SmartKey® Re-Key Technology with BumpGuard™ Protection
- Comes with two keys
- Tapered deadbolt design permits misaligned doors to lock & unlock with ease
- Easily installs in minutes with just a screwdriver
- 10-digit keypad with one-touch locking
- Provides S2 Access Control security
- 128-bit Advanced Encryption Standard communication
- Incorrect code protection with audible alarm



Available Finishes:



Satin Nickel



Venetian Bronze



Matte Black



Product Specifications

Door Prep:	Face Bore: 1 1/2 to 2 1/8" Latch Hole: 1" Backset: 2 3/8 or 2 3/4"	Bolt:	1" throw, steal deadbolt
Door Thickness:	1 3/8" to 1 3/4" automatic adjustment	Power Source:	6V (4 AA alkaline batteries)
Faceplate:	1" x 2 1/4" round corner	Cylinder:	SmartKey® Keyway
Strikes:	1 1/8" to 2 3/4" round corner	Wireless Protocol:	Z-Wave 908.42 MHz (U.S.)
Latch:	2 3/8" to 2 3/4" round corner	Handing:	Reversible
		ANSI/BHMA:	Grade 2

Kwikset SmartCode 916 Deadbolt

Keyed | Touchscreen

The SmartCode 916 Z-Wave Plus Touchscreen Deadbolt features a 10-digit touchscreen for coded entry, as well as Z-Wave technology to communicate with other Z-Wave devices in your home. Z-Wave also supports remote control, so you can lock/unlock your door from anywhere in the world! Designed to allow fast code entry, the touchscreen is exceptionally responsive, detecting every touch.

Contemporary



Traditional



Features

- Lock/unlock door via keypad, app, or turnkey
- BumpGuard prevents lock bumping (picking)
- SmartKey Re-Key Technology allows you to rekey the lock yourself in seconds
- Tapered deadbolt design, enables misaligned doors to lock without pulling or pushing the door shut
- Easy installation, no wiring needed
- 20 Minute Fire Rating – UL Certified
- Full 128-bit encryption security



Available Finishes:



Satin Nickel



Venetian Bronze

Product Specifications

Door Prep:	Face Bore: 2 1/8" Edge Bore: 1" Backset: 2 3/8" or 2 3/4"	Bolt:	1" throw, steal deadbolt
Door Thickness:	1 3/8" to 1 3/4" automatic adjustment	Power Source:	6V (4 AA alkaline batteries)
Faceplate:	1" x 2 1/4" round corner	Cylinder:	SmartKey Re-Key Technology
Strikes:	2 3/4" to 2 1/8" round corner	Wireless Protocol:	Z-Wave 908.42 MHz (U.S.)
Latch:	2 3/8" to 2 3/4" round corner	Handing:	Reversible
		ANSI/BHMA:	Grade 2

Yale Assure Lock

Keyed | Pushbutton or Touchscreen

Forget carrying around keys; unlock your home using a 4-8 digit entry code on the backlit keypad. Create unique entry codes to share with friends and family so you'll never have to lend a key. The keypad has backlit numbers that won't wear off. Lock the door behind you by pressing any key or enable Auto Relock to ensure the door is always locked when you leave. The lock is packaged with two matching keys for you to have, just in case.

Features

- Create/manage entry codes within the app
- Delete codes quickly
- Installs in minutes with just a screwdriver
- Weather protection gasket
- One touch locking
- Backlit numbers that won't wear off
- Privacy button
- Tamper-resistant battery cover



YRD216
Keyed
Pushbutton



YRD226
Keyed
Touchscreen



Available
Finishes:



Satin
Nickel



Oil-Rubbed
Bronze

Product Specifications

YRD 216 Dimensions:	Exterior: 1 3/16" x 2 3/4" x 5 3/16" Interior: 2 1/8" x 3" x 6 7/8"	Latchbolt Type:	Round corner, adjustable
YRD 226 Dimensions:	Exterior: 1 3/8" x 2 3/4" x 6 1/16" Interior: 2 1/8" x 3" x 6 7/8"	Handing:	Self-handing (please hand while in unlocked position)
Door Prep:	Face Bore: 2 1/8" Edge Bore: 1" Backset: 2 3/8" or 2 3/4"	Power Source:	4 AA alkaline batteries
Door Thickness:	1 3/8" to 1 3/4"	Keyway:	KW-15 pin
		ANSI/BHMA:	A156.36 Grade 2

Yale SL Pro Deadbolt

Key-Free | Pushbutton or Touchscreen

This electronic, motorized deadbolt features a slim design, while offering a pushbutton (YRD136) or a touch-capacitive (YRD156) keypad on the outside and a thumbturn on the inside. As a no-cylinder "key-free" model, the Yale Pro SL Z-Wave Plus Deadbolt prevents lock picking or bumping. By integrating this Z-Wave Plus lock into your Z-Wave network, you can make your home even smarter with wireless capabilities.

Features

- Key-free lock eliminates risk of picking/bumping
- Lock/unlock via Z-Wave or numbered access code
- Remove individual codes whenever you need to
- Z-Wave Plus certified for wide compatibility
- Battery-powered with optional backup
- Voice assistance guides you through programming
- Weather-resistant keypad numbers won't wear off
- Give unique codes to friends and family



YRD136
Key-Free
Pushbutton



YRD156
Key-Free
Touchscreen



Available Finishes:



Satin
Nickel



Oil-Rubbed
Bronze



Black
Suede



Product Specifications

Dimensions	Exterior: 1 1/16" x 2 9/19" x 3 9/16" Interior: 3 3/4" x 3 1/4" x 6 3/4"	Handing:	Self-handing (please hand while in unlocked position)
Door Prep:	Face Bore: 2 1/8" or 1 1/2" Edge Bore: 1" Backset: 2 3/8" or 2 3/4"	Power Source:	4 AA alkaline batteries
Door Thickness:	1 3/8" to 2 1/4"	Incompatible With:	Mortise Locks, Interconnected Locks, Rim Cylinder Locks
Latchbolt Type:	Round corner, adjustable	ANSI/BHMA:	A156.36 Grade 2

Yale Assure Levers

The Yale Assure Levers are perfect for securing doors that do not have a deadbolt, from side entries, garages, basements, interior rooms and more. They feature Z-Wave technology and seamlessly integrate into Rently's smart home system. Lock and unlock your door, create and remove unique codes, view access history, and receive notifications from anywhere.



YRL216
Keyed
Pushbutton



YRL226
Keyed
Touchscreen



YRL236
Key-Free
Pushbutton



YRL256
Key-Free
Touchscreen

Features

- Backlit keypad that won't wear off
- Wake or lock the keypad with only a touch
- Enable Auto Relock to ensure your door is always locked
- Levers can be energized with a back up 9V battery
- Keyed models come with two keys
- Touchscreen model has voice guidance for programming

Available
Finishes:



Satin
Nickel



Oil-Rubbed
Bronze



Product Specifications

Dimensions	Exterior: 2 7/16" x 2 9/19" x 6 1/16" Interior: 3" x 2 3/4" x 6 3/8"	Latch:	2 3/8" or 2 3/4"
Door Prep:	Face Bore: 2 1/8" Edge Bore: 1" Backset: 2 3/8" or 2 3/4"	Latch Faceplate:	2 1/4" round corner
Door Thickness:	1 3/8" to 1 3/4"	Handing:	Reversible
Strike Plate:	1" x 2 3/4" round corner	Power Source:	4 AA alkaline batteries
		Keyway:	KW-15 pin
		ANSI/BHMA Rating:	Grade 2 (Better)

Yale Assure Lock Interconnected

Ideal for multifamily and single family residential use, this Z-Wave integrated lock from Yale offers a smooth, weather-resistant design and easy installation. The interior lever retracts the latch and deadbolt simultaneously for a quick exit while the motorized deadbolt ensures a secure lock every time.

Features

- Available in 4" or 5 ½" center-to-center*
- Rubber gasket protects your door and shields your lock from weather elements
- Motorized, tapered deadbolt
- Solid metal escutcheon
- Privacy button prevents unwanted access from the outside at the touch of a button
- Keypad wakes with a touch
- Single point lock
- The latchbolt and deadbolt are operated by either lever at all times
- Deadbolt activated by keypad or key on outside, or by thumbturn on the inside
- The interior lever retracts the latch and deadbolt simultaneously



YRC216
Pushbutton | Keyed



YRC226
Touchscreen | Keyed



YRC256
Touchscreen | Key-Free

Available Finishes:



Satin Nickel



Oil-Rubbed
Bronze

Product Specifications

Door Prep:	Face Bore: 2 ½" Edge Bore: 1" 4" or 5 ½" center-to-center
Door Thickness:	1 ¾" to 1 ¾"
Latch Faceplate:	1" W x 2 1/4" H; round corner
Backset:	2 ¾" or 2 ¾"
Strike:	1" x 2 ¼" (deadbolt) 2 ¼" (Lever)

Door Handling:	Reversible
Keypad:	Touchscreen or pushbutton
Keying:	Key different
Power Source:	4 AA batteries
ANSI/BHMA Rating:	Grade 2 (Better)

*Please anticipate a 6-week lead time for 4" center-to-center

Yale nexTouch Cylindrical

Add multiple secure means to enter your home with the Yale nexTouch Cylindrical Deadbolt (Key Override). This electronic cylindrical door lock gives you 3 ways to access your home: inputting a 4-8 digit code into the keypad, using a traditional key, or remotely accessing the lock via smartphone app. Available in pushbutton and touchscreen models.

Features

- Integrates seamlessly with existing alarm and automation systems
- Wireless keypad lock secures your home and connects to Z-Wave networks
- Lock/unlock via numbered access code, turnkey, or app
- Create and share unique PIN codes for your family, friends, and delivery services.
- Easy to install, battery-powered with optional 9V backup
- Voice assistance guides you through programming in three languages
- Weather resistant seal protects the keypad from the elements
- Keypad lockout: disable the keypad after five successive failed attempts



NTB610
Keyed
Pushbutton



NTB620
Keyed
Touchscreen



Available in
Satin Chrome

Product Specifications

Door Prep:	Cross Bore: 2 1/8" Edge Bore: 1" Backset: 2 3/4" (70mm)	Power Source:	4 AA alkaline batteries (optional hardwire input for 9V DC external power); 9V battery power backup
Door Thickness:	1 3/4" (44mm); please inquire for other door thicknesses	Approvals:	ADA, ANSI/BHMA Grade 1, EPD, FCC, GreenCircle, ISO 14001, Windstorm, UL/cUL rating up to and including 3 hours
Handing:	Field reversible		
Latchbolt:	1/2" stainless steel throw		

Yale nexTouch Sectional Mortise

The nexTouch Sectional Mortise Keypad Lock provides robust security to any building. This mortise lock is great for multifamily and assisted living application.

Features

- Integrates seamlessly with existing alarm and automation systems
- Wireless latch bolt and keypad secure your home and connect to Z-Wave networks
- Lock/unlock via numbered access code, turnkey, or app
- Create and share unique PIN codes for your family, friends, and delivery services
- Easy to install, battery-powered with optional backup
- Voice assistance guides you through programming in three languages
- Weather resistant seal protects the keypad from the elements
- Keypad lockout: disable the keypad after five successive failed attempts



NTM620
Keyed
Touchscreen
No Deadbolt



NTM610
Keyed
Pushbutton
No Deadbolt



Available in
Satin Chrome

Product Specifications

Door Prep:	Face Bore: 2 1/8" Edge Bore: 1" Backset: 2 3/4"	Power Source:	4 AA alkaline batteries (optional hardwire input for 9V DC external power); 9V battery power backup
Door Thickness:	1 3/4" Please inquire for other door thicknesses	Approvals:	ADA, ANSI/BHMA Grade 1, EPD, FCC, GreenCircle, ISO 14001, Windstorm, UL/cUL rating up to and including 3 hours

Kwikset Passage Knob & Lever

This passage knob and lever are best used on interior hall and closet doors where no locking is required, so they are always free to turn.

- Microban Antimicrobial product protection keeps door hardware 99.9% cleaner than unprotected surfaces
- Latch has interchangeable faceplates; round corner or square corner
- Easily install in minutes with only a screwdriver
- ANSI/BHMA Grade 3 Certified



Polo Knob



Balboa Lever

Available Finishes:



Satin Nickel



Venetian Bronze

Yale Passage Knob

Ideal for a front door entry when paired with a Yale Keypad Lock. Also great for pantry, laundry room, study, secondary doors, or any door that doesn't require a privacy lock.

- Pre-installed, concealed mounting screws
- Removable knob/Rosettes: easy, scratch-free installation
- Heavy-duty shroud: added anti-pry security
- Four-wound spring chassis: gives a heavy-duty feel and eliminates lever sag
- ANSI/BHMA Grade 2 Certified



Cambridge Knob

Available Finishes:



Satin Nickel



Oil-Rubbed Bronze

All Knob & Lever Specifications

Door Prep:	Face Bore: 2 1/8" Edge Bore: 1" Backset: 2 3/8" or 2 3/4"
Door Thickness:	1 3/8" to 1 3/4"

Faceplate:	1" x 2 1/4" round or square corner
Strikes:	2 1/4" full lip standard
Door Handing:	Reversible

GoControl Garage Door Controller

The GoControl Garage Door Controller with S2 Security adds Z-Wave remote control to most sectional garage door openers, allowing you to operate the opener through a Z-Wave controller, smartphone app, or an existing pushbutton. This new version of GoControl's garage door controller features S2 encryption for more secure wireless communication and increased Z-Wave transmission range. The Garage Door Controller can emit audio and visual alerts to warn people nearby when the garage door is about to open/close. The included tilt sensor also sends status updates to inform you when the garage door is closed, open, or moving.



Features

- Adds Z-Wave control to a connected garage door opener
- Works with almost any sectional garage door
- Can be included in Z-Wave automation scenes and schedules
- Included tilt sensor detects door's open/closed status
- Customizable audio and visual alerts enhance safety

Product Specifications

Controller Dimensions:	6.94" x 1.38" x 5.0"	Z-Wave Frequency:	908.42 MHz
Tilt Sensor Dimensions:	1.69" x 0.88" x 1.19"	Wireless Range:	Up to 130 feet
Power:	120VAC, 50/60 Hz	Scene:	Command Class
Sensor Frequency:	345 MHz	Certifications:	FCC, ETL, UL 325

SMART MONITORING

Rently Doorbell Camera	27
Rently Battery Doorbell Camera and Rently Tone	28
Rently Siren Alarm	30
Rently Door & Window Sensor	31
Rently Motion Sensor	32
Rently Motion Sensor 2	33
HomeSeer Z-Wave Plus Motion Sensor	34

Rently Doorbell Camera

The Rently Doorbell Camera provides enhanced security by connecting to the Rently Smart Home app, ensuring real-time updates. The video feed can be shared with family members who can also preview it online.



Features

- HD video with night vision and local video storage
- Can be used to speak with people at the front door
- Ability to record video when doorbell detects motion
- Weather resistant
- Ability to brand doorbell

Product Specifications

General

Dimensions:	45 x 28 x 115mm
Operating Temp:	-20 °C to 50 °C
Power Supply:	AC12~24V, DC5V1A
Ingress Protection:	IP54
Storage:	SD card (Max.128G), cloud storage
Net Weight:	90g
WDR:	DWDR

Network

Alarm Trigger:	Motion detection, button triggering
Comm. Protocol:	HTTP, DHCP, DNS, TCP/IP, RTSP
Interface Protocol:	Private
Wireless:	2.4G Wi-Fi (IEEE802.11b/g/n)
Mobile Phone OS:	iOS 9 or later, Android 5 or later
Security:	AES128

Camera

Image Sensor:	1/2.9" 2 Megapixel CMOS
Effective Pixels:	1920(H) x 1080(V)
Shutter:	1/15~1/10,000s
Min. Illuminance:	Color 0.1Lux@F2.0 Black/White 0.01Lux@F2.0
IR Distance:	Night visibility up to 10m
Day/Night:	Auto(ICR)/Color/ B/W
WDR:	DWDR
Lens:	2.4mm@F2.0, 145°

Audio and Video

Compression:	H.264/H.265
Bit Rate:	32Kbps~2Mbps
Audio Input/Output:	Built-in mic/speaker

Rently Battery Doorbell Camera

The Rently Battery Doorbell Camera provides enhanced security by connecting to the Rently Smart Home app, ensuring real-time updates. With HD video, night vision, two-way voice communication, weather resistance, and local video storage, you'll always be up-to-date on property activity.



Features

- 100% wire-free
- Rechargeable battery-powered
- PIR motion sensor for instant & accurate alerts
- Support Android /iOS system mobile devices, for remote real-time monitoring
- Supports full duplex audio
- Supports micro SD card (max 128 GB) storage
- Low-battery notifications



Rently Tone

DC (USB) powered wireless doorbell chime. Comes with the Rently Battery Doorbell Camera, or can be ordered separately.

Features

- 4 ringtones to choose from
- Adjust volume via smartphone



Rently Battery Doorbell Camera Specifications

General

Dimensions:	57 x 41 x 145 mm
Net Weight:	200g
Operating Temp:	-20 °C to 50 °C
IP Rating:	IP65
Power Supply:	DC 5V/1A, AC 12~24V
Power Consumption:	Max. 2W
Accessory:	Rently Tone
Storage:	SD card (Max.128G), cloud storage

Battery and PIR

Capacity:	6700mAh rechargeable Li batteries
Standby Current:	200-800 µA (average)
Working Current:	50-200 mA (IR off)
Standby Time:	10 months
Working Time:	3 months (wake up 10x per day)
PIR Detection Range:	Max. 5m
PIR Angle:	100°

Audio and Video

Compression:	H.264
Bit Rate:	32Kbps~2Mbps
Frame Rate:	1~25fps
Dual Stream:	Yes
Audio Input/Output:	Built-in mic/speaker

Camera

Image Sensor:	1/2.9" 2 Megapixel CMOS
Effective Pixels:	1920(H) x 1080(V)
Shutter:	1/15~1/10,000s
Min. Illumination:	Color 0.1Lux@F2.0 Black/White 0.01Lux@F2.0
IR Distance:	Night visibility up to 10m
Day/Night:	Auto(ICR)/Color/B&W
WDR:	DWDR
Lens:	3.2mm@F2.0, 106°/57°/130°

Network

Alarm Trigger:	Button triggering, PIR detection
Wireless Protocol:	64/128-bit WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Comm. Protocol:	HTTP, DHCP, DNS, TCP/IP
Interface Protocol:	Private
Wireless:	2.4G Wi-Fi (IEEE802.11b/g/n)
Mobile Phone OS:	iOS 9 or later, Android 5 or later
Security:	AES128
Max. User Access:	4



Rently Tone Specifications

Power:	DC 5V/1A
Reset:	Supported
Ringtone:	4 optional melodies
Volume:	Adjustable

Frequency:	433/868/915MHz
Transmission Range:	Max. 100m (no obstacle)
Dimensions:	60 × 24mm
Net Weight:	33g

Rently Alarm Siren

The Siren works as a deterrent for any suspicious activity detected by your existing Rently sensors. Suitable for entrance door, windows, or within unit.



Product Specifications

Wireless Distance:	50m outdoor; 30m indoor
Radio Frequency:	869.4MHz EU; 908.4 MHz US; 921.4MHz ANZ; 869.2MHz RU
Dimensions (DxWxH):	68mm x 68mm x 33mm
Net Weight:	48g/pcs
Power Specification:	CR123A-1500mAh x 2
Max Current:	35mA (radio transmitter mode); 500mA (siren on & max volume mode)
Stand-By Time:	1 year (alarm 1 time for 10sec daily)
Operating Temperature:	0°C~ 40°C (32°F~104°F)
Operating Humidity:	20% ~ 85% non-condensing
Storage Temp:	0°C ~ 60°C (32°F ~140°F)
Storage Humidity:	0% ~ 90% non-condensing
Sound Intensity:	>90 dB
Power Consumption:	2W
Certification:	CE, FCC, RoHS

Features

- Alarm: up to 120 dB with flashing LED light
- 24/7 Monitoring: instant mobile phone alerts
- Easy installation with screws or stickers
- Timer Control: schedule siren to arm at desired times

CE FC RoHS

Rently Door & Window Sensor

Contact sensors that notify you when an entrance has been opened or has been left open. Ideal for placement on doors or windows.



Features

- Two statuses: open and closed
- Real-time alerts
- Compatible with Z-Wave 300 series and 500 series
- Easily install with screws or stickers
- Red LED lights when triggered

Product Specifications

Range:	Up to 60m outdoors; Up to 30m indoors
Radio Frequency:	868.4MHz EU; 9008.4MHz US
Power:	CR2x1
Standby Current:	1uA
Battery Life:	2 years
Operation Temperature:	0 °C – 40 °C
Size (LxWxH):	Main Body: 70mmx20mmx20mm; Deputy Body: 40mmx11mmx11mm

CE FC RoHS

Rently Motion Sensor

Detect intruders and get real-time alerts sent directly to your smartphone. Receive notifications if any motion is detected outside of a self-guided tour and create monitoring schedules to stay aware of what's happening inside your home.



Product Specifications

Network Range:	up to 50m outdoors up to 30m indoors
Dimensions:	(DxWxH) 45mm x 45mm x 48mm
Net Weight:	42g
Battery:	CR123A 3V x 1
Work Current:	15mA
Standby Current:	11uA
Standby Time:	1 year (alarm once for 10sec daily)
Detection Range:	10m
Detection Angle:	120°
Radio Protocol:	Z-Wave
Radio Frequency:	868.4MHz EU 908.4MHz US 921.4MHz ANZ 869.2MHz RU
Operating Temp:	0 °C ~ 70 °C
Certification:	CE, FCC, RoHS

Features

- PIR motion detection, day and night
- Wide-angle monitoring
- Easy installation, easy adjustment
- LED light flashes when triggered
- SmartStart: just scan the QR code to add the device to your network

CE FC RoHS

Rently Motion Sensor 2

The next generation of our Motion Sensor, this device features a longer battery life and temperature/humidity detection. Receive notifications sent directly to your smartphone when changes are detected.





Product Specifications

Network Range:	up to 50m outdoors; up to 30m indoors
Dimensions:	(DxWxH) 68mm x 56mm x 56mm
Battery:	CR123A 3V x 2
Work Current:	15mA
Standby Current:	38uA
Standby Time:	2 years (alarm once for 10 sec daily)
Detection Range:	10m
Detection Angle:	120°
Radio Protocol:	Z-Wave
Radio Frequency:	868.4MHz EU; 908.4MHz US; 921.4MHz ANZ; 869.2MHz RU
Operating Temp:	0 °C ~40 °C
Certification:	CE, FCC, RoHS

Features

- PIR motion detection, day and night
- Temperature and humidity detection
- Wide-angle monitoring
- Easy installation, easy adjustment
- LED light flashes when triggered
- SmartStart: just scan the QR code to add the device to your network

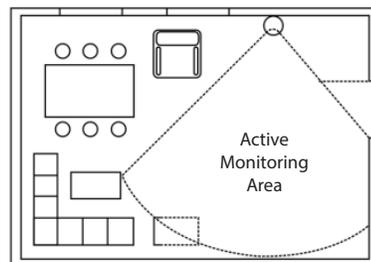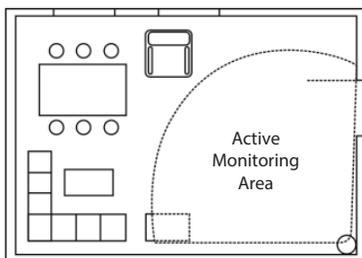

HomeSeer Motion Sensor

A compact, easy-to-install Z-Wave Plus smart motion sensor that's designed to report to your smart home hub and app when motion is sensed or when motion has not been sensed for a period of time. Use to track occupancy or monitor for security.

Features

- Magnetic mount
- Blue LED indicator
- Easy installation, easy adjustment
- Supports S2 security
- Works on battery power or line power (adapter not included)



Product Specifications

Z-Wave Frequency:	908 MHz
Dimensions (main unit):	2" x 2" x 1.75"
Operating Temp Range:	0 °C to 40°C (indoors)
Power Requirements:	(1) CR123A battery or micro USB port
Network Range:	up to 300 ft line of sight

ENERGY MANAGEMENT

Honeywell T6 Pro Thermostat	36
2GIG Programmable Thermostat	37
Jasco Smart Switches	38
Aeotec Z-Wave Range Extender 7	41

Honeywell T6 Pro Thermostat

A Z-Wave Plus certified thermostat that can be remotely controlled via the Rently Smart Home App for easy programming and automation to deliver energy savings and comfort. Operators can gain insight into HVAC performance, extend the life of their HVAC, and save on utility costs by setting custom schedules.

Features

- Compatible with most HVAC systems
- Set up custom heating and cooling schedules from the Rently Smart Home App for each hour or day of the week
- You can display ambient air temperature or % relative indoor humidity, or see whether your cooling/heating system is running
- When Auto mode is selected, the T6 Pro Z-Wave thermostat can automatically determine whether your home needs heating or cooling to reach the desired temperature at the right time
- The T6 Pro Z-Wave thermostat can alert you when your HVAC system is not working properly and can remind you about things like when to change your furnace filter
- Adaptive Intelligent Recovery: the T6 Pro Z-Wave thermostat learns your heating and cooling cycle times to make sure the system delivers the temperature you want, when you want it. (Available only if the local thermostat schedule is enabled)



Product Specifications

Model Number:	TH6320ZW2003
Stages:	Up to 3 heat, 2 cool heat pump Up to 2 heat, 2 cool conventional
Battery Power:	3 AA alkaline batteries
C-Wire Input:	18-30VAC; 50Hz-60Hz
Dimensions:	4.09" x 4.09" x 1.06"
Display Size:	6.55 sq. in.
Adjustable Heat Temp:	40-90°F (4.5-32.0°C)
Adjustable Cool Temp:	50-99°F (10.0-37.0°C)
Operating Temperature:	37-102°F (2.78-38.89°C)
Operating Humidity:	5% to 90% (non-condensing)
Temp. Sensor Accuracy:	± 1.5°F at 70°F (0.85°C at 21.0°C)
Frequency:	908.42 MHz
Node Type (C-wire):	Always On Slave (AOS)
Node Type (Battery)	Listening Sleeping Slave (LSS)
Z-Wave Chipset:	ZM5202AU

2GIG Programmable Thermostat

This programmable Z-Wave 700 thermostat allows you to command your heating and AC systems from the thermostat or through your smart device using a Z-Wave network. Suitable for both new and retrofit applications, the 2GIG Z-Wave 700 Programmable Thermostat works with most modern HVAC systems (standard and heat pump)



Features

- Compatible with most HVAC systems
- Capacitive touch buttons and bright LED screen provide clear info and controls
- Display shows current system mode, temperature set points, humidity, and time
- External humidifier/dehumidifier support
- Fahrenheit/Celsius mode and sensor calibration
- SmartStart Support and S2 authentication security
- 24VAC or AA battery powered

Compatibility

- Standard Gas/Electric HVAC: 2-stage heating, 2-stage cooling
- Heat Pump HVAC: 3-stage heating, 2-stage cooling and humidifier/dehumidifier support

Product Specifications

Dimensions:	5.75" x 4.5" x 1" (14.6 x 11.4 x 2.5 cm)	Standard Systems:	1 stage heating and cooling 2 stage heating and cooling
Weight:	1lb (0.45kg)	Heat Pump Systems:	1 stage heating and cooling 2 stage heating and cooling 2nd or 3rd stage aux heating (electric heat strips)
Power Supply:	AC: 18-26VAC 60Hz (R and C) 4x AA battery (6V DC)	Fan Control:	Auto/On
Operating Temperature:	32° to 122° F (0° to 50° C)	Control Logic:	Compressor short cycle protection: 5-9 minutes, user configurable
Operating Humidity:	10-90% Non-condensing	Minimum Run Time:	3 minutes (gas/electric heating) 4 minutes (compressor operation)
Room Temp. Measurement:	Scale: Fahrenheit or Celsius Range: 32 ~ 122°F Temp. Accuracy: ± 1°F (0.5°C)	Program:	OFF, Heat, Cool, Auto, E-Heat
Temperature Setpoint:	Heat set point: 32 – 90 °F (0 – 32°C) Cool set point: 61 – 122 °F (16 – 50°C) Setting resolution: 1°F (0.5°C)	Certification:	FCC Part 15, Industry Canada, Z-Wave

Enbrighten/Jasco Z-Wave Plus Plug-In Smart Switch

Adds Z-Wave on/off remote control to two devices. This dual outlet plug-in module fits into any grounded power outlet and allows for two plug-in lamps or devices to be controlled by on/off remote Z-Wave commands from a Z-Wave controller, the module's local button, or a connected switch.



- Dual outlet design provides Z-Wave on/off control of two devices
- Button glows blue when light is switched on
- Horizontal configuration prevents blocking of nearby outlets
- For indoor use only

Product Specifications

Power:	120VAC, 60Hz	Wireless Range:	Up to 150 feet line of sight
Signal Frequency:	908.4/916MHz	Operating Temperature:	32° to 104°F (0° to 40°C)
Max Load (Both Z-Wave Outlets):	Tungsten: 600W (5A) Motor: 1/2 HP Resistive: 1800W (15A)	Approvals:	FCC, IC

Jasco In-Wall Smart Toggle Switch

Adds on/off remote Z-Wave control and local control of wired lights or appliances. The toggle switch can be included in multiple automation groups or scenes and a blue LED indicator helps guide you to the switch through the dark.



- Works with incandescent, LED, CFL, and halogen lighting
- Supports 2, 3, 4, 5, or 6-way wiring configurations
- Suitable for single-pole or multi-pole applications
- Can be included in multiple automated groups or scenes

Product Specifications

Power:	120VAC, 60Hz	Wireless Range:	Up to 150 feet line of sight
Signal Frequency:	908.4/916MHz	Operating Temperature:	32° to 104°F (0° to 40°C)
Load Ratings:	960W Incandescent; 1800W (15A) Resistive or 1/2 HP Motor	Approvals:	FCC, IC

Jasco In-Wall Smart Dimmer

A hardwired smart dimmer that operates wall, ceiling, and accent lighting through individual commands and programmed settings. The dimmer adjusts brightness levels of dimmable LED, CFL, incandescent and halogen lights from 0-100 percent to reduce energy costs and improve bulb life



- The QuickFit design features 20% smaller depth compared to previous models, and eliminates the need for heat tabs
- SimpleWire: Auto-detecting line/load terminals support fast installation by identifying line and load wires and configuring the switch accordingly
- Multi-switch compatible

Jasco In-Wall Tamper Resistant Smart Outlet

Enables wireless control of on/off functions from the Z-Wave controlled outlet. The receptacle replaces your current electrical outlet, uses your existing wiring and provides a Z-Wave enabled outlet for the lamp or appliance that you would like to control and a standard pass-through AC outlet for other electrical appliances.



- Outlet Options: Use one grounded Z-Wave controlled outlet to wirelessly schedule and operate a lamp or small appliance from anywhere at any time with a mobile device. The always-on outlet provides continuous power for traditional use.
- Tamper-resistant
- Requires neutral wire
- Compatible with incandescent, LED, Xenon, Halogen, fluorescent and compact fluorescent bulbs.

Product Specifications

Power:	120VAC, 60Hz
Signal Frequency:	908.4/916MHz
Maximum Load:	600W Incandescent 300 Dimmable CFL/LED
Range:	Up to 150 feet from controller or closest Z-Wave device
Operating Temperature:	32-104° F (0-40° C)
Warranty:	2-year limited product warranty



Jasco Auxiliary/ Remote Wall Switch

Create a 3-way or 4-way switch by combining this auxiliary switch with a main Jasco light switch. When used in conjunction, these auxiliary switches allow you to control one load with multiple switches, up to 6-way operations. This Jasco switch is ideal for hallways, staircases, or other areas where multiple switches would add convenience.



- Supports up to 6-way wiring configurations
- Requires wiring connections: Neutral, Traveler and Ground
- Includes interchangeable paddles
- The QuickFit design features 20% smaller depth compared to previous models, and eliminates the need for heat tabs
- SimpleWire: Auto-detecting line/load terminals support fast installation by identifying line and load wires and configuring the switch accordingly

Jasco Z-Wave In-Wall Add-On Toggle Switch

Create a multi-way lighting group by pairing this toggle switch with a main Jasco Z-Wave light switch. This Z-Wave auxiliary toggle switch allows you to wire multiple switches to a single electrical load. Ideal for large indoor areas including hallways, staircases, or other areas.



- Works with dimmable incandescent, LED, CFL, and halogen lighting
- Supports 2, 3, 4, 5, or 6-way wiring configurations
- Suitable for single-pole or multi-pole applications
- Can be included in multiple automated groups or scenes

Product Specifications

Power:	120VAC, 60Hz
Signal Frequency:	908.4/916MHz
Range:	Up to 150 feet from controller or closest Z-Wave device
Operating Temperature:	32-104° F (0-40° C)
Approvals:	UL Listed



Aeotec Z-Wave Range Extender 7

Amplify all Z-Wave signals within your Z-Wave network with the Aeotec Z-Wave Range Extender 7. This wireless repeater improves the signal strength of Z-Wave networks by passing along commands from transmitters and controllers to their intended recipient, providing sufficient signal strength over long distances and large homes. The repeater's small size prevents it from covering up adjacent outlets, so you can boost your network without sacrificing a second plug.



Features

- Plugs into a standard power outlet
- **250% further wireless range:** amplifies and repeats weak signals boosting the range and reliability of weak Z-Wave/Z-Wave Plus devices.
- **50% faster communication:** built upon Aeotec's unique Gen7 hardware and firmware stack, allowing stable performance and seamless automation
- **Security 2 System compatible:** can amplify and repeat signals from security focused devices, including door locks and smoke sensors
- **Z-Wave Plus certified:** compatible with all new and old generations of Z-Wave technology

Product Specifications

Model Number:	ZW189-A01	Relative Humidity:	8% to 80%
Product Dimensions:	53.2 x 46 x 40 mm	Operating distance:	Over 70 m (229 ft) indoors Up to 150 m (492 ft) outdoors
Package Dimensions:	76 x 68 x 58 mm	Operating Temp:	32°F to 104°F (0°C to 40°C)
Product Weight:	38 g	Beaming Capable:	Yes
Total Package Weight:	66 g	Security Supported:	S2 Unauthenticated, S2 Authenticated
UPC/EAN:	810667025274	Power Consumption:	0.6W
Smart Start:	Yes		

DAMAGE PREVENTION

FirstAlert Z-Wave Smoke and Carbon Monoxide Detector	43
HomeSeer Z-Wave Plus Perimeter Water Sensor	44
2GIG Dual Flood/Temperature Sensor	45
Aeotec Z-Wave Water Sensor 7 Pro	46

FirstAlert CO/Smoke Detector

2-in-1 Smoke/Fire & Carbon Monoxide Alarm: The First Alert ZCOMBO alarm features a photoelectric sensor that detects the smoke most commonly produced by smoldering fires, providing sensitive detection while minimizing false alarms. The advanced electrochemical CO sensor detects carbon monoxide. Unique alarm sounds and indicator lights on the face of the detector distinguish a smoke warning from a carbon monoxide warning.

Features

- **Battery-Operated for Convenience:** The battery-operated combination smoke and CO alarm installs in minutes. The detector requires two AA batteries, and features a chirp and indicator light to let you know when they need replacing
- **Easy Installation:** The alarm mounts easily to a ceiling or wall, and comes with pins to secure the alarm to the base to prevent tampering
- **Mobile Alerts for Peace of Mind:** The integrated wireless alarm system sends you mobile alerts, so you're aware of dangers after the alarm is activated, whether you're home or away
- **Test & Silence Button:** For efficient testing



Product Specifications

Dimensions:	(LxWxH) 5" x 5" x 2"
Model:	ZCOMBO
UPC:	029054011381
Power:	2 AA batteries
Sensor Type:	Electrochemical, Photoelectric
Weight:	0.7 lb
Certifications:	UL217 and UL2034

HomeSeer Perimeter Water Sensor

A compact, battery-powered leak sensor that detects leaks via built-in and wired probes and sends alerts to the Rently Smart Home App. The unit may be deployed as a free-standing sensor (using built-in probes) or as a wired remote sensor (via the wall mount/wired probe assembly).

Features

- Magnetic wall mount/wired probe
- OTA-supported
- Low battery alert
- Accurate detection
- S2 Framework implemented
- Can be used to trigger home automation events (aka “scenes”) or other Z-Wave devices such as sirens or water valve controllers



Product Specifications

Model:	HS-LS100+
Battery:	1xER14250
Frequency:	908.42 MHz
Operation Temp:	0°C–40°C
Range:	Up to 300ft line of sight
Dimensions:	2.75" x 2.75" x 0.75"

2GIG Dual Flood/Temperature Sensor

The 2GIG Dual Flood/Temperature Sensor monitors for water leaks and extreme temperatures within a selected area. It can be placed near water-using appliances to detect water leakage as soon as it occurs. To monitor ambient temperature, place the sensor within an area that needs to stay at a certain temperature. When the sensor detects standing water (for three minutes) it will send a wet alarm transmission to the Rently Hub. When it no longer senses liquid (for three minutes) it will send a restore (dry) report. It will also send a trouble alert if the ambient room temperature exceeds 95° F or falls below 42° F.



Features

- Monitors wet/dry conditions and ambient temperature
- Can also detect clean/dirty fresh water, salt water, or tap water
- Battery-powered, no wiring required
- Wireless range up to 275 feet
- Five-year battery life
- ETL listed



Product Specifications

Dimensions (HxWxD):	Sensor Probe: 2.92" x 0.94" x 0.85" Probe in Bracket: 1.46" x 1.54" x 0.57" Cord: 45" cord with 0.169" diameter
Range:	275 ft. open-air
Code Outputs:	Alarm; Alarm Restore; Supervisory Low Battery; Tamper; Tamper Restore; Trouble; Trouble Restore
Frequency:	345 MHz (crystal controlled)
Supervisory Interval:	70 minutes
Battery:	CR 2.3V Lithium (included)
Battery Life:	5 years
Housing Material:	ABS Plastic

Aeotech Z-Wave Water Sensor 7 Pro

A 3-in-1 multi-sensor that's your first line of defense against expensive leaks, drips, pipe bursts, and floods. Monitoring more than just the presence of liquid, Water Sensor 7 Pro can also monitor the absence of water. When used to monitor tanks or pits, Water Sensor 7 Pro can alert you when water levels get too low and can also trigger automation routines.



Features

- Wireless and battery powered: installation is as easy as sticking it to a surface
- The stainless-steel detection-tip can detect as little as 0.5mm / 0.02" on a surface
- Can instruct water valves to automatically close and alert you to overflows
- When water levels are detected to be too high or low, turn on electronic pumps or sump pumps and run them for a defined period or until the desirable water level is reached



Product Specifications

Product Weight:	42 g
Product Dimensions:	70 x 13 x 20 mm
Wire Length:	1.1 m
Operating Distance:	More than 164 feet indoors Up to 492 feet outdoors.
Operating Temperature:	32°F to 113°F / 0°C to 45°C.
Battery Type:	1/2 AA ER14250 3.6V
Battery Life:	Up to 3 Years
Max Current Consumption:	5mW
Water Sensor:	Detects as little as 0.02" of liquid and upwards
Temperature Sensor:	Measures between 14°F and 149°F with as little as ±1.8°F of variance
Humidity Sensor:	Monitor between 0% and 80% with as little as ±3% of variance



1-888-340-6340 | sales@rently.com | www.rently.com